Specifications

	AP Pro 300M	AP Pro Duo	AP Pro AC	
Product Code	APP-AGN	APP-AGN2	APP-AGN3	
Basic				
Ethernet Ports	1 (GE) 1 (GE)		2 (GE)	
Console Port with Adapter	(Shared with LAN interface)	•	0	
Wi-Fi Standards	802.11 a/b/g/n	802.11 a/b/g/n	802.11 a/b/g/n/ac	
Data Rates	2 x 2 MIMO 2.4 GHz: 300 Mbps 5 GHz: 300 Mbps	2 x 2 MIMO 2.4 GHz: 300 Mbps 5 GHz: 300 Mbps	3 x 3 MIMO 2.4 GHz: 450 Mbps 5 GHz: 1300 Mbps	
Simultaneous 2.4GHz and 5GHz	2.4 GHz or 5 GHz	•	•	
Transmit Power	2412 - 2472 MHz: 26 dBm (FCC) / 20 dBm (CE) 2412-2472 MHz: 24 dBm (FCC) / 17 dBm (5180 - 5825 MHz: 25 dBm (FCC) / 20 dBm (CE) 5180-5825 MHz: 22 dBm (FCC) / 17 dBm (
Recommended Concurrent Users Per Radio	60			
SSID Per Radio	16			
Hardware				
Antenna Type	2 x Female N-Type Connectors	4 x Female N-Type Connectors	3x Female N-Type Connectors	
Enclosure	IP67 Outdoor Metal Enclosure			
Dimensions	9.0 x 12.2 x 2.6 inches / 230 x 310 x 66 mm			
Weight	5.84 pounds / 2.65 kg			
Operation				
Power Input	Power over Ethernet 802.3af	Device: 10V - 30V DC, 3A Power over Ethernet 802.3at	Device: 12V - 36V DC Power over Ethernet 802.3af	
Power Consumption	13W (max.)	25.5W (max.)	13W (max.)	
Operating Temperature	-40° – 149°F / -40° – 65°C			
Humidity	15% – 95% (non-condensing)			
Certifications	FCC, CE, RoHS			
Warranty	1-Year Limited Warranty			

AP Pro Rugged Outdoor Wi-Fi that Goes the Distance



Deliver fast and reliable Wi-Fi in even the harshest conditions with the AP Pro. The AP Pro's sealed, all-metal IP67 enclosure stands up to dirt, water, and extreme temperatures for years of dependable operation in industrial, public safety, transport, and other applications. Built-in PoE gives you more installation options and reduces deployment costs. And intuitive console- and cloud-based control makes configuration and maintenance simple for everyone.

Heat, Cold, Dust, and Water. All in a Day's Work.

The AP Pro is designed and manufactured with the strictest standards. Built from rugged electronics and tough aircraft-grade aluminum enclosure to seal against water and dust, the AP Pro handles just about anything the factory floor, construction site, or Mother Nature can dish out. The AP Pro can also withstand temperatures from -40° to 65°C, and it's protected against ESD and surges, so it stays up and running in conditions that would quickly shut down other access points.

TruePower Networking. Up for Every Challenge.

The AP Pro features our TruePower RF technology, which delivers maximum transmission power across all links at even the highest data rates. With TruePower, you get reliable, fast connections at distances that put other radios out of reach.

Onsite or in the Cloud. Complete Control, Just a Click Away.

The AP Pro features Peplink's WLAN Controller for quick and simple onsite setup and configuration. Not onsite? Not a problem. Just open a Web browser and take control anywhere with our cloud-based InControl 2 configuration and administration solution.

Ordering Information

Product Code	Product Name	Description
APP-AGN	AP Pro 300M	Industrial-grade 802.11 a/b/g/n 300 Mbps access point in metallic waterproof and dust-tight IP67 outdoor enclosure.
APP-AGN2	AP Pro Duo	Industrial-grade 802.11 a/b/g/n 600 Mbps simultaneous 2.4 & 5 GHz access point in metallic waterproof and dust-tight IP67 outdoor enclosure.
APP-AGN3	AP Pro AC	Industrial-grade 802.11 a/b/g/n/ac 1750 Mbps simultaneous 2.4 & 5 GHz access point in metallic waterproof and dust-tight IP67 outdoor enclosure.

Features

Network Bridge Mode Router (NAT) Mode Wireless Distribution System (WDS) Support for PPPoE, Static IP, DHCP Management VLAN (802.1p) Spanning Tree Protocol (802.1d)

Radio Multiple SSID Auto Channel Selection Transmit Power Adjustment Neighbor AP Detection

peplink PEPWAVE

Client Managment Per SSID VLAN with QoS (802.1p/802.1q) Bandwidth Control MAC Address Filtering Laver 2 Client Isolation Limit on Max. Number of Client

Per Client VLAN with RADIUS VLAN with VLAN Pool Bandwidth Control Multicast Filter IGMP Snooping/Multicast Enhancement **AP Security** Open, WEP 802.1x with Dynamic WEP WPA-PSK/RADIUS WPA2-PSK/RADIUS

Complete VPN Solution

PepVPN Site-to-Site VPN 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing

Captive Portal By InControl By Peplink AP Controller

Device Management


Web Administrative Interface InControl Cloud Management Peplink AP Controlle SNMP v1, v2c and v3

Certification FCC, CE, RoHS

> www.peplink.com ©Peplink. All rights reserved

> > ap-pro-201809-v1



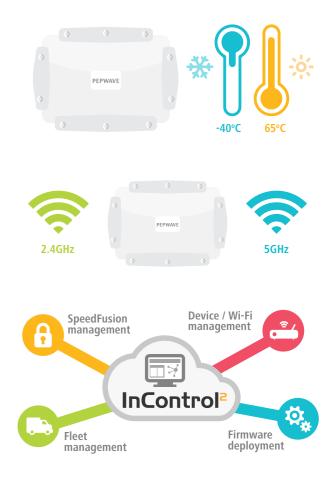

For Large Ship Marine Connectivity


For Construction Site Connectivity


For Industrial Connectivity







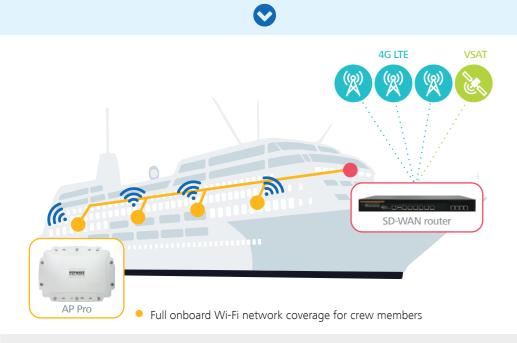

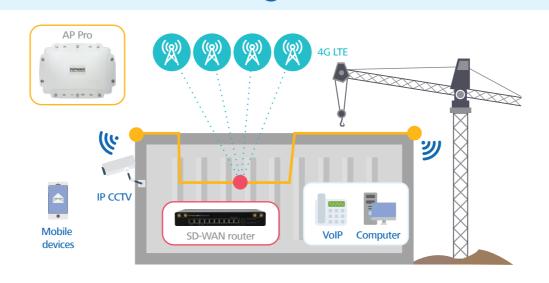

• Extended Wi-Fi coverage across the site ensures security, connectivity back to the corporate network

and Dust-Tight Enclosure Ideal for

Outdoor

Applications







12.2 inches / 310 mm





AP Pro Duo



AP Pro 300M

Wireless assembly equipment

• Offer reliable long-range wireless coverage for harsh indoor environments

