


# Device Connector IP55

Vendor Neutral Bridge, Long Range Wireless Bridge

## Specifications

	Device Connector IP55
Product Code	DCS-GN-IP55
Wi-Fi Interface	802.11ac/a/b/g/n 2x2 MIMO
Ethernet Port	3 x GE
Hardware Features	
Enclosure	IP55 Outdoor Enclosure
Dimension	11.8 x 4.9 x 1.2 inches 300 x 124 x 31 mm
Weight	0.96 pounds 435 grams
Power Input	802.3af
Power Consumption	12.95 (max.)
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS
Warranty	1-Year Limited Warranty

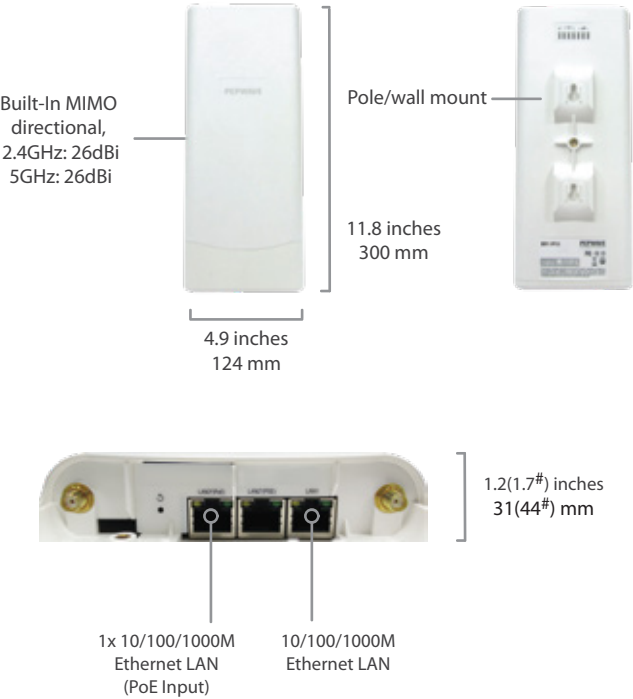

## Product Ordering Information

IP55	Device Connector – Outdoor IP55 Compact		
	Product Code	Product Name	Description
	DCS-GN-IP55	Device Connector IP55	802.11ac/a/b/g/n 1166Mbps layer 2 client bridge in waterproof IP55 outdoor enclosure. Manageable by InControl cloud management.
	Accessories for IP55 Models		
IP55	Product Code	Compatible With	Description
	ACW-510	DCS-GN-IP55	Wall/pole mount with flexible ball joint for high-precision installation.
	ACW-107	DCS-GN-IP55	802.3af/at PoE Injector
	ACW-109	DCS-GN-IP55	1x 56V/2.1A Power Supply and PoE License to Enable 802.3at PoE+ Output

## Features

<b>Network</b> Bridge Mode Router (NAT) Mode Support for PPP, Static IP, DHCP	<b>AP Security</b> Open WPA-PSK/RADIUS WPA2-PSK/RADIUS	<b>Complete VPN Solution</b> PepVPN Site-to-Site VPN 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing	<b>Device Management</b> Web Administrative Interface InControl Cloud Management FusionHub Controller SNMP v1, v2c and v3
<b>Radio</b> Multiple SSID Transmit Power Adjustment	<b>Client Authentication</b> EAP-TTLS/EAP-PEAP/EAP-TLS CHAP/MSCHAP/MSCHAPV2/PAP EAP Outer Authentication Identity RADIUS Server with Certificate Authentication		<b>Certification</b> FCC, CE, RoHS

# Device Connector IP55

Vendor Neutral Bridge, Long Range Wireless Bridge



The Device Connector IP55 enables Ethernet devices to access wireless networks with unbreakable reliability. Using our signal bonding technology, Ethernet devices can connect using the combined bandwidth of 2.4GHz and 5GHz frequency Wi-Fi in a single LAN connection. The Device Connector is compatible with any access point, so you can just drop it in and go – no network reconfiguration or device upgrades needed.

### Need to Connect to Wi-Fi?



Get the Coverage You Need Without Plug-and-Play.

Easily extend Wi-Fi coverage in minutes with Pepwave's Device Connector IP55. The Device Connector gets your devices talking over a large area without wires or configuration headaches. And because it works transparently at Layer 2, the Device Connector is compatible with any access point.


### Need More Reliability?



Turn your 2.4GHz and 5GHz Signals Into One Connection.

Normally, Wi-Fi devices will force you to choose between 5GHz or 2.4GHz. With the Device Connector IP55, you can have both. Simply connect your device to the Ethernet port and the device connector will combine 5GHz and 2HGz into a single reliable connection.

### Jumping Between APs?



CarFi Fast Roaming. WAN Reliability with Wi-Fi Mobility.\*

CarFi Fast Roaming, let your Device Connector IP55 seamlessly hop from AP to AP in a matter of seconds. Whether you're commanding an emergency situation, coordinating a construction project, or keeping your warehouse stocked, CarFi Fast Roaming keeps everyone communicating at all times.


\* Optional Software Upgrade

Compact Super-Duty IP55 Enclosure



The Device Connector IP55 has a waterproof IP55 enclosure that stands up to dust, vibration, and inclement weather.


Point-to-Point Deployment

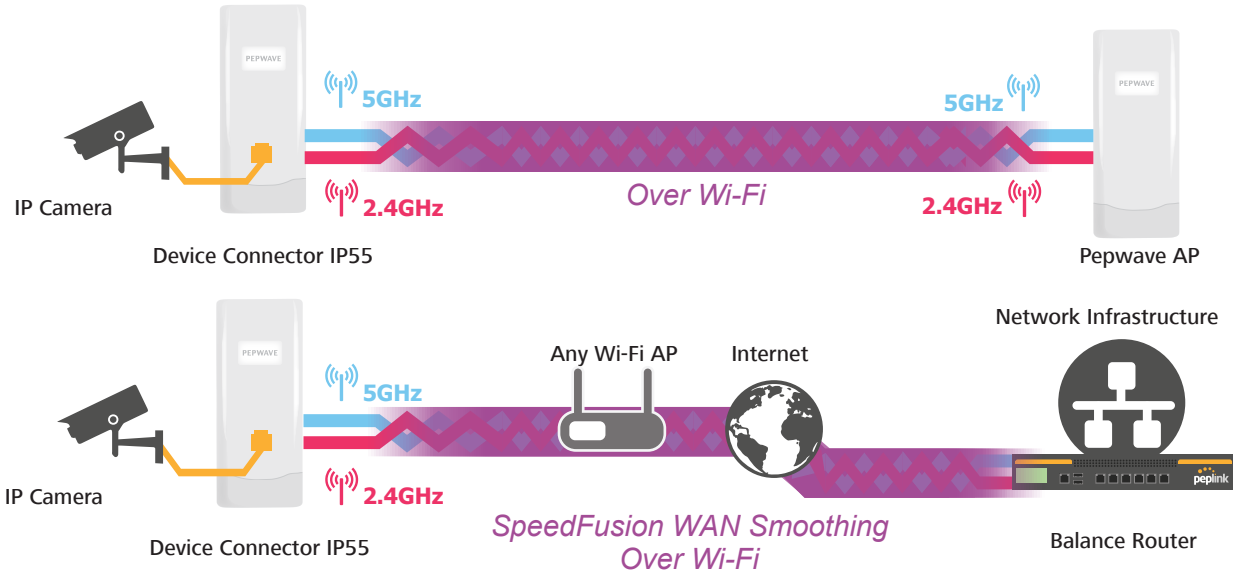

Using the Device Connector IP55, the IP camera is able to upload videos using both the 5GHz and 2.4GHz frequencies at the same time. If one frequency loses connectivity, the other will seamlessly take over. If the

network is using an AP from another vendor, frequency combination can also be achieved by forming a SpeedFusion tunnel between the device connector and a SpeedFusion-enabled router.


One Access Point, Multiple Devices

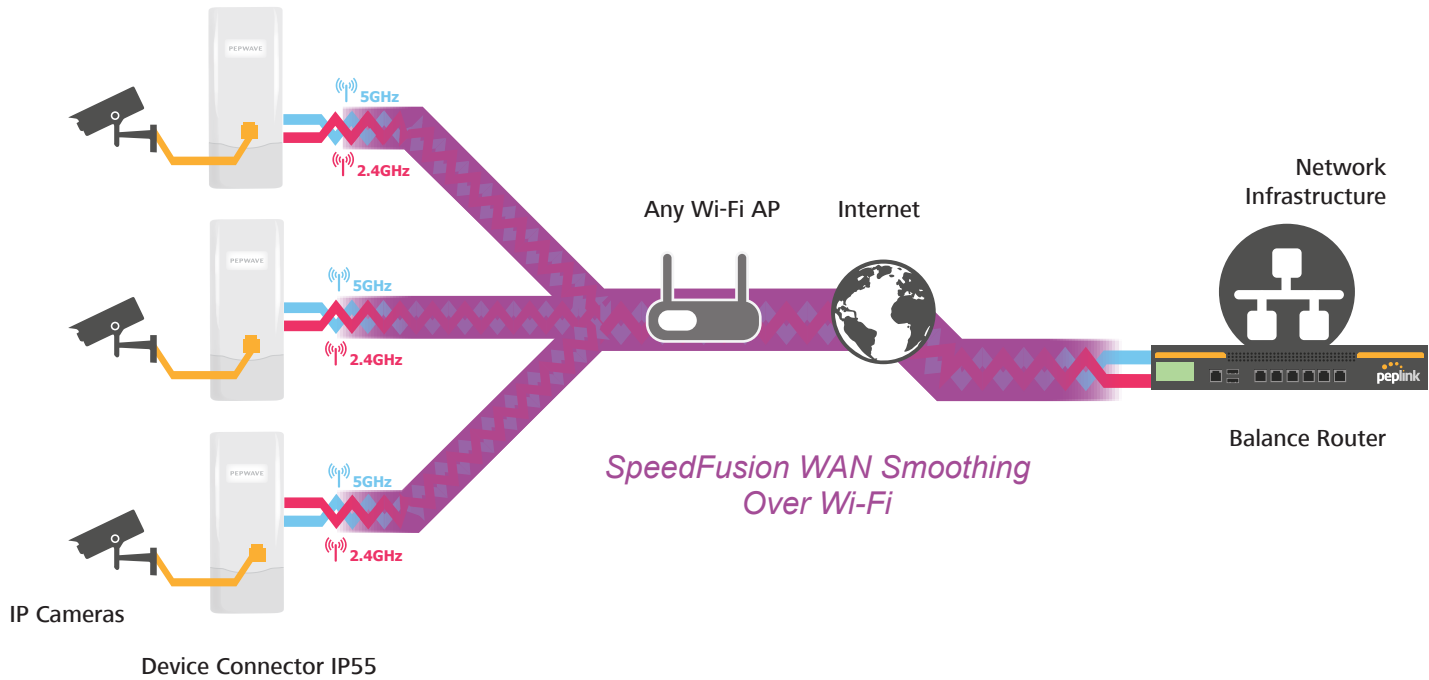

Multiple devices could connect to headquarters using both the 2.4GHz and 5 GHz frequencies coming from a single AP. This is achieved by hooking up a Device Connector IP55 to each device, and then connecting them any


AP. Using this configuration, the device connectors will be able to form SpeedFusion connections with the Balance Router located at the network infrastructure, providing the enhanced reliability of combined bandwidth.

SpeedFusion Between Wi-Fi and Landline

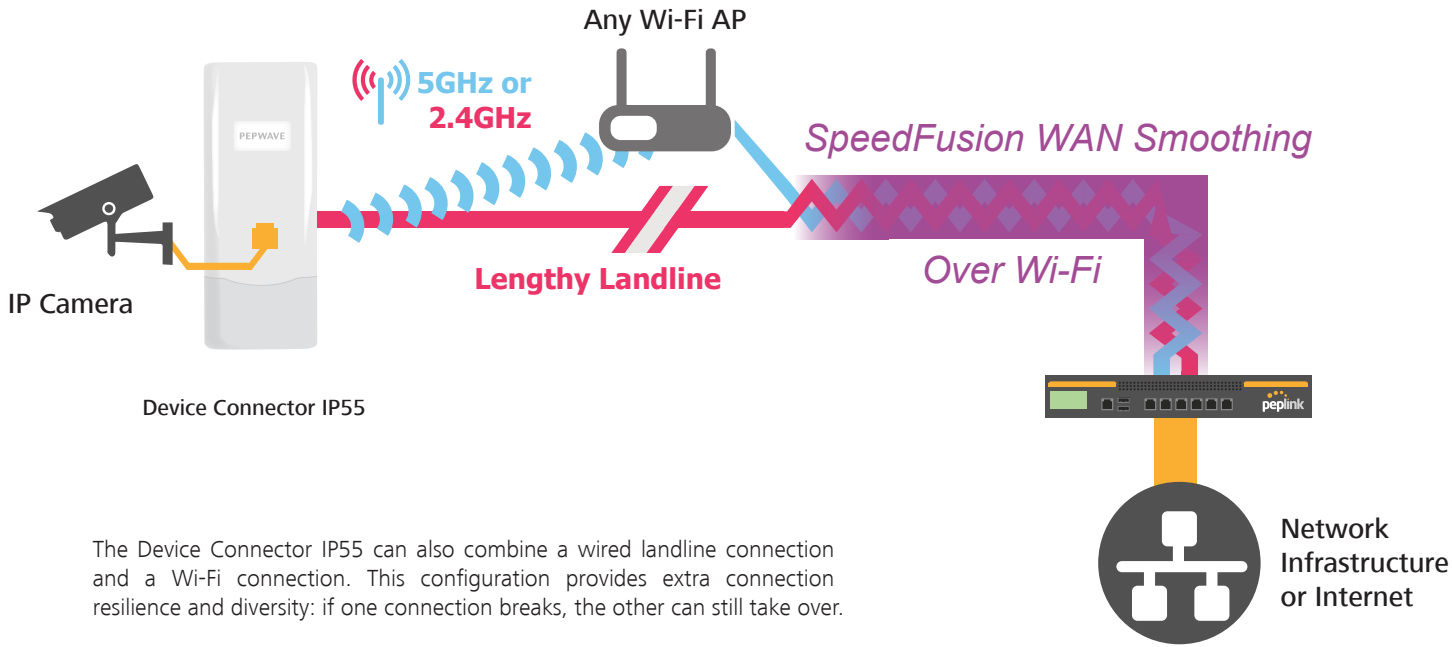

The Device Connector IP55 can also combine a wired landline connection and a Wi-Fi connection. This configuration provides extra connection resilience and diversity: if one connection breaks, the other can still take over.

Multiple Devices, Multiple Access Points

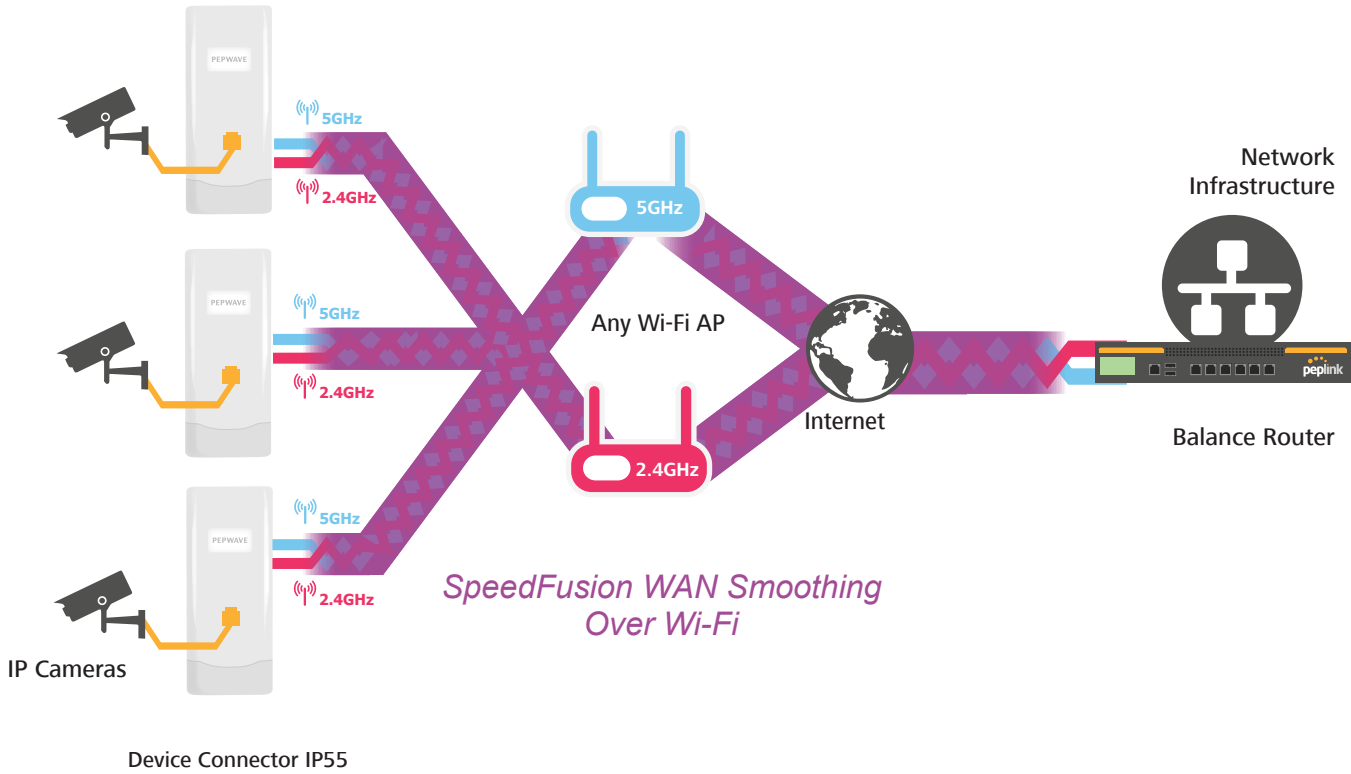

Even with each frequency coming from a different AP, the Device Connector IP55 can combine the 2.4GHz and 5.0 GHz frequencies. To do so, simply place a SpeedFusion enabled router at your network

infrastructure to receive the combined traffic. This configuration provides additional reliability; if one AP ceases to function for any reason, all devices can still connect using the other AP.